


**POUR 1 CHARIOT  
20 niv. - 600x800 mm**

**FOR 1 TROLLEY  
20 lev. - 600x800 mm**

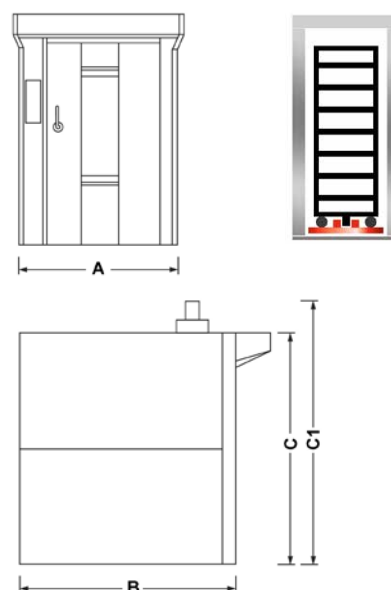

## FRP68-PEX

**Energie : électrique, gaz ou fuel**

Tableau de commande digital  
Affichage digital de la température  
Minuterie  
Générateur de vapeur  
Hotte dynamique intégrée  
Economiseur d'énergie pour le modèle électrique  
**Rotation du chariot par plateforme**  
Thermostat de sécurité  
Vannes de détente  
Isolation laine de verre  
Façade inox  
Porte avec large hublot

Livré démonté, livré sans brûleur,  
livré sans chariot

### OPTIONS

- Montage du four
- Brûleur fuel ou gaz
- Chariots
- Grilles - Filets - Plaques

## FRP68-PEx

**Energy : electricity, gas or gasoil**

Digital control panel  
Digital display for temperature  
Timer  
Steam generator  
Incorporated hood  
Energy saver for electrical model  
**Platform for trolley loading**  
Safety thermostat  
Expansion valves  
Glass wool insulation  
Stainless steel front side  
Door with with wide window

Supplied not assembled, supplied without burner,  
supplied without trolley

### OPTIONS

- Assembling
- Gasoil or gas burner
- Trolleys
- Grids - Trays - Baking trays

	FRP68-PE	FRP68-PESB-G	FRP68-PESB-F
<b>Energie / Energy</b>			
	Electricité / Electricity	Gaz / Gas	Fuel / Gasoil
<b>Dimensions / Dimensions</b>			
A mm	1460	1460	1460
B mm	2110	2110	2110
C mm	2300	2300	2300
C1 mm	2530	2530	2530
<b>Poids / Weight</b>			
Kg	1450	1510	1510
<b>Puissance totale à installer / Total power to install</b>			
Electrique / Electricity	48 kW	3.5	3.5
Thermique / Thermal	-	73100 Kcal/h	73100 Kcal/h
	-	85 kW/h	85 kW/h
	-	290200 BTU/h	290200 BTU/h
	-	306000 Kj/h	306000 Kj/h
<b>Consommation théorique / Theoretical consumption</b>			
GPL (37mBar)	-	6.6 Kg/h - 3.3 Kg/h	-
Gaz méthane / Methane gas	-	8.1 m3/h - 4.1 m3/h	-
Fuel / Gasoil	-	-	9.1 L/h - 4.6 L/h
<b>Voltage / Voltage</b>			
	TRI - 230/400V - 50/60Hz		