

Photos non contractuelles / Photos not contractual



- Capacité de refroidissement : environ 6°C/h
- Température de l'eau en sortie 2°C
- 2 Cuves inox
- Capacité : 200 litres
- Gaz réfrigérant : R449A
- Bâti en acier inoxydable AISI 304
- Isolant thermique polyuréthane
- Équipé avec vanne purgée d'air et vanne d'arrêt
- Cuve fermée et sous pression du réseau d'eau
- Valve de purge d'air
- 230/50Hz/1
- Puissance : 1 kW
- Poids net : 160 kg

Options :


Support mural
Support pour sol
Doseur d'eau digital
Version horizontale
60Hz



- Refrigerating capacity : around 6°C/h
- Water outlet temperature : 2°C
- 2 Stainless steel vat
- Capacity : 200 litres
- Cooling gas : R449A
- Stainless steel AISI 304 frame
- Thermal insulation with polyurethane
- Equipped with an air valve and a shut-off valve
- Closed vat and under pressure of the water system
- Air vent valve
- 230/50Hz/1
- Power : 1 kW
- Net weight : 160 kg

Options :

Wall bracket
Floor support
Digital water measurer
Horizontal version
60Hz

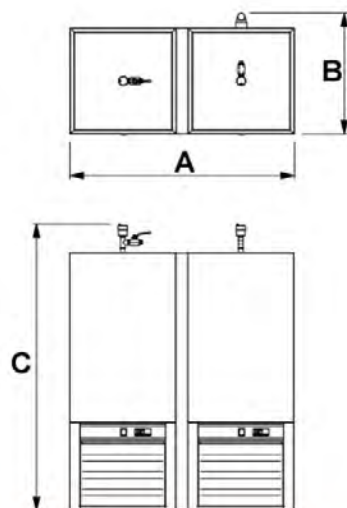

A = 1055 mm
B = 570 mm
C = 1350 mm

