

GAMME STANDARD

STANDARD RANGE


**PEXMC-TR**

2 vitesses  
 Cuve inox  
 Tête relevable  
 Cuve amovible (sauf sur PE60MC-TR)  
 Outil inox  
 Grille de protection inox relevable  
 Pieds réglables

Minuterie  
 Tableau de commande électromécanique  
 Transmission par chaines

**OPTION**

- Roulettes à frein (sauf sur PE60MC-TR)

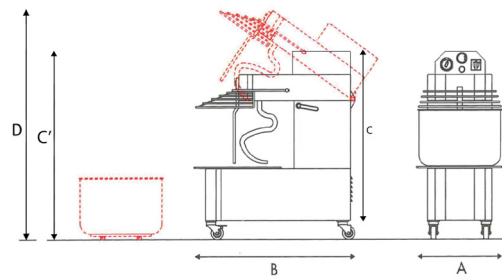
**PEXMC-TR**

2 speeds  
 Stainless steel bowl  
 Lifiable head  
 Removable bowl (except for PE60MC-TR)  
 Stainless steel raising safety grid  
 Stainless steel tool  
 Adjustable feet

Timer  
 Electromechanical control panel  
 Chain transmission

**OPTION**

- Castors with brake (except for PE60MC-TR)


**PE18MC-TR**
**PE25MC-TR**
**PE38MC-TR**
**PE44MC-TR**
**PE60MC-TR**
**Dimensions / Dimensions**

A mm	410	430	480	550	585
B mm	715	770	820	878	1050
C mm	820	900	900	900	1210
C' mm (avec roulettes / with castors)	875	850	760	955	-
D mm	1040	1150	1230	1240	1680

**Poids / Weight**

Kg	70	95	110	120	226
----	----	----	-----	-----	-----

**Capacités / Capacities**

Cuve / Bowl (L)	20	33	40	50	75
Farine / Flour (kg)	9*	15*	19*	24*	35
Pâte / Dough (kg)	15*	24*	31*	38*	56*

**Nombre de vitesses / Number of speeds**

	2	2	2	2	2
--	---	---	---	---	---

**Puissance moteur / Motor power**

1ère vitesse / 1st speed (Kw)	0.6	1	1.5	1.5	2.6
2ème vitesse / 2nd speed (Kw)	0.8	1.4	2.2	2.2	3.4

**Voltage / Voltage**

TRI - 400V - 50/60Hz